




**CMR 372, 100 hPa F.S.,
DN 16 ISO-KF**

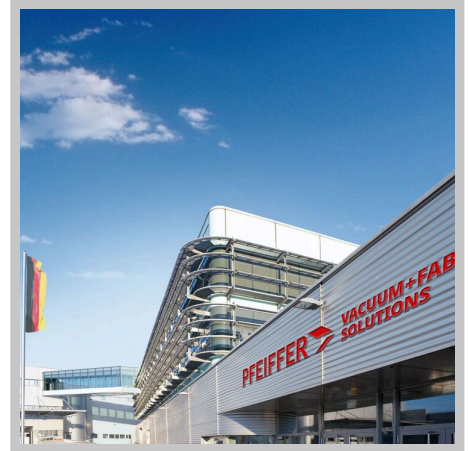

PFEIFFER

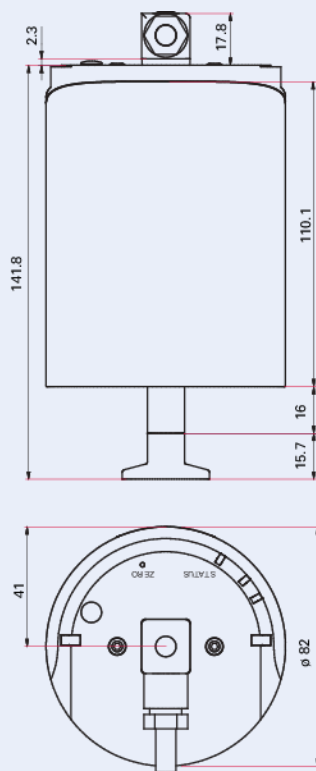


Illustration only

CMR 372, 100 hPa F.S., DN 16 ISO-KF

- Measurement range from $1 \cdot 10^{-2}$ – 110 hPa
- Minimal zero drift
- Sensor in ceramic technology
- No memory effects
- Materials employed have identical temperature coefficients
- Outstanding long-term and temperature stability
- Sensor-Shield provides additional protection against contamination
- Calibration test report included in delivery

Dimensions



Technical Data	CMR 372, 100 hPa F.S., DN 16 ISO-KF
Output signal: Measuring range	1 – 9.8 V
Measuring range	$1 \cdot 10^{-2} - 1.1 \cdot 10^2$ hPa
Materials in contact with media	Ceramic ($\text{Al}_2\text{O}_3 = 99.5\%$) Stainless steel (AISI 316L)
Flange, material	Stainless steel 1.4404 (AISI 316L)
Temperature effect: on zero point	0,0025 % F.S./°C
Temperature effect: on range	0.01% of measured value/ °C
Anode	130727
Ambient temperature	10 – 40 °C
Operating temperature	≤ 45 °C
Accuracy of measurement	0.15 % (of measured value)
Measuring method	Capacitive
Input voltage(s)	14 – 30 V DC
Volume	≤4.2 cm ³
Bakeout temperature at the flange	≤110 °C ≤230 °F ≤383.15 K
Output signal: Minimum load	10 kΩ
Pressure max.	$2 \cdot 10^3$ hPa $1.5 \cdot 10^3$ Torr $2 \cdot 10^3$ mbar
Full scale	100 hPa 75 Torr 100 mbar
Weight approx.	0.9 kg 1.98 lb
Resolution	0.003 % F.S.
Response time	30 ms
Power consumption max.	12 W
Connection flange	DN 16 ISO-KF

Order number	CMR 372, 100 hPa F.S., DN 16 ISO-KF
CMR 372, 100 hPa F.S., DN 16 ISO-KF	PT R25 111



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 