



**CCT 362, tube OD 1/2",
RS-485**



PFEIFFER 

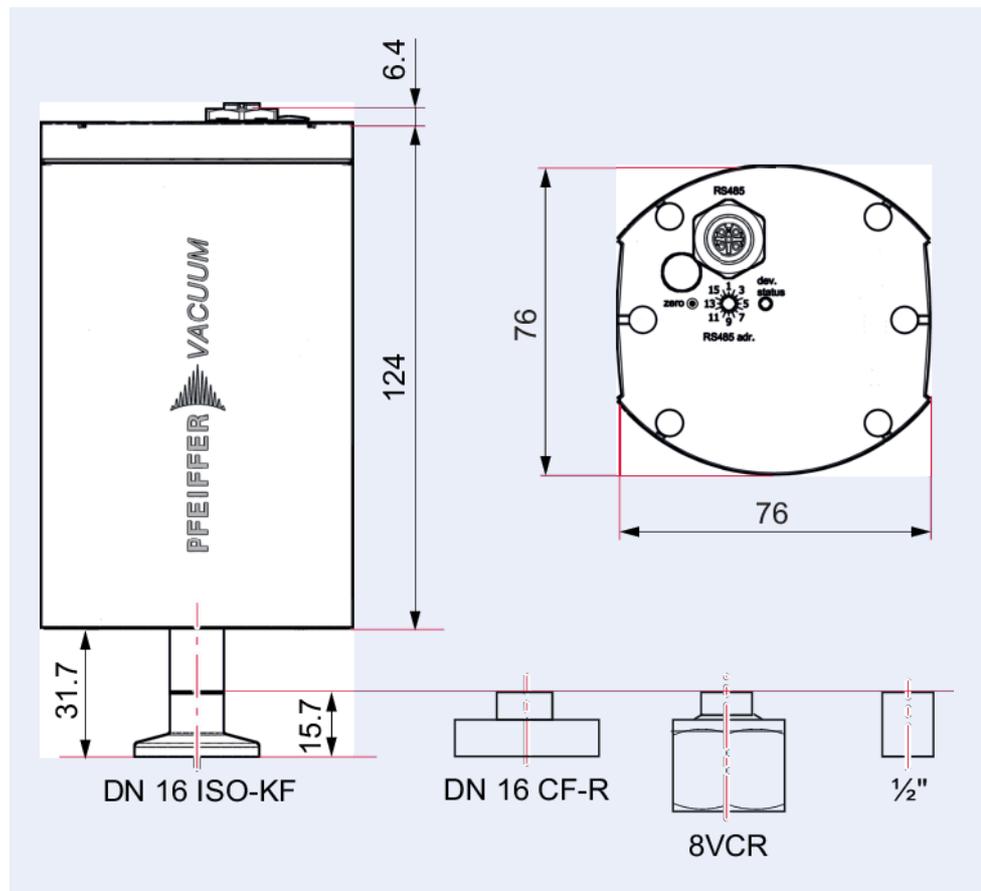


Illustration only

CCT 362, tube OD 1/2", RS-485

- Measurement range: $1 \cdot 10^{-2}$ – 110 hPa
- Pressure measurement independent of type of gas
- Minimal zero drift
- Precise temperature compensation
- Sensor in ceramic technology
- Calibration test report included in delivery

Dimensions



Technical Data	CCT 362, tube OD ½", RS-485
Measuring range	$1 \cdot 10^{-2} - 1.1 \cdot 10^2$ hPa
Materials in contact with media	Ceramic ($\text{Al}_2\text{O}_3 = 99.5\%$) Stainless steel (AISI 316L)
Temperature effect: on zero point	0,005 % F.S./°C
Temperature effect: on range	0.01% of measured value/ °C
I/O interfaces	RS-485
Anode	130727
Ambient temperature	5 – 50 °C
Accuracy of measurement	0.2 % (of measured value)
Measuring method	Capacitive
Input voltage(s)	14 – 30 V DC
Bakeout temperature at the flange	≤ 110 °C ≤ 230 °F ≤ 383.15 K
Pressure max.	$2.6 \cdot 10^3$ hPa $1.95 \cdot 10^3$ Torr $2.6 \cdot 10^3$ mbar
Full scale	100 hPa 75 Torr 100 mbar
Weight approx.	0.62 kg 1.37 lb
Resolution	0.003 % F.S.
Measuring cycle	60 ms
Power consumption max.	2 W
Connection flange	AD ½"
Electrical connection	RS485, M12, 5-pole, socket, a-coded

Order number	CCT 362, tube OD ½", RS-485
CCT 362, tube OD ½", RS-485	PT R51 060



Are you looking for an optimum vacuum solution?

**Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media
#pfeiffervacuum**



www.pfeiffer-vacuum.com

PFEIFFER 