

# ASM 2000

Leak detectors

## Highly sensitive

Helium leak detection down to  $\approx 0.01 \mu\text{m}$ , specially designed for validating sterile packaging

## Deterministic

Quantifiable and repeatable results according to USP <1207> standard

## Versatile

Turnkey solution with customized test chambers, adaptable to vials, syringes, bottles and other non-porous packages


### Accessories

- Helium spray gun
- Sniffer probe
- Exhaust filter
- Dry chiller module – 90
- Customized tooling

# ASM 2000

Leak detectors

**Dimensional drawing**

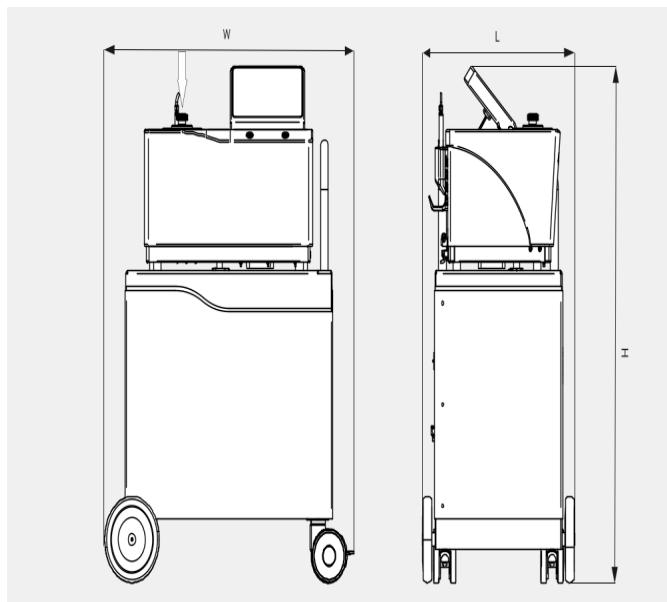

**Pumping speed**

The following technical values refer to ISO Hz

ASM 2000	
<b>Test methods</b>	Vacuum and sniffing leak detection
<b>Quantitative measurement range fine leak helium</b>	$<1 \cdot 10^{-9} - 1 \cdot 10^{-7}$ mbar · l/s
<b>Qualitative measurement range gross leak helium</b>	$1 \cdot 10^{-6} - 1 \cdot 10^{-3}$ mbar · l/s
<b>Qualitative measurement range massive leak air</b>	$>1 \cdot 10^{-3}$ mbar · l/s
<b>Minimum detectable helium leakage (sniffing test)</b>	$>1 \cdot 10^{-9}$ mbar · l/s
<b>CDA supply</b>	required for operation
<b>CDA quality</b>	1.3.1 according to ISO 8573-1
<b>CDA pressure (bar rel.)</b>	4.5 - 10 bar rel.
<b>CDA pressure (psig)</b>	65 - 145 psig
<b>Helium supply</b>	required for operation

# ASM 2000

Leak detectors

ASM 2000	
<b>Helium pressure (bar rel.)</b>	4.5 - 10 bar rel.
<b>Helium pressure (psig)</b>	65 - 145 psig
<b>Nitrogen supply</b>	required for operation
<b>Nitrogen pressure (bar rel.)</b>	4.5 - 10 bar rel.
<b>Nitrogen pressure (psig)</b>	65 - 145 psig
<b>Power supply</b>	90 - 250 V AC
<b>Typical power consumption</b>	3750 W
<b>Operating temperature</b>	15 - 25 °C
<b>Humidity</b>	30 - 80 %
<b>User interface</b>	10" multi-touch full HD color screen
<b>Software</b>	21 CFR part 11 compliance, PDF GMP test and calibration reports, authentication local or domain (LDAP)
<b>Operating system</b>	Windows 10
<b>Network connection</b>	1x LAN (RJ45)
<b>Interfaces</b>	2x USB 3.0 (ext.), 1x HDMI
<b>Sound pressure level</b>	<53 dB(A)
<b>Weight approx.</b>	140 kg
<b>Dimensions (L x W x H) (mm)</b>	913 x 558 x 1197 mm
<b>Dimensions (L x W x H) (inch)</b>	913 x 558 x 1197 inch