

ATP 2300 M

Turbomolecular vacuum pumps

PFEIFFER 
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP



Quiet

Low noise and vibration levels, perfectly suited for vibration-sensitive applications in semiconductor manufacturing processes and analytical instrumentation

Flexible

Compatible with a variety of backing pumps, excellent compression ratio for light gases

Maintenance-free

No wearing parts thanks to magnetic bearing technology, long maintenance intervals

Accessories, spare parts and options

- Installation kit
- Cooling water valve
- Purge gas valve
- Handheld remote controller
- Rack-mounted controller
- Inlet protection screen
- Heater unit
- Valve cable and coil
- Various inlet flange types
- Various user interfaces


ATP 2300 M

Turbomolecular vacuum pumps


PFEIFFER
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

Dimensional drawing

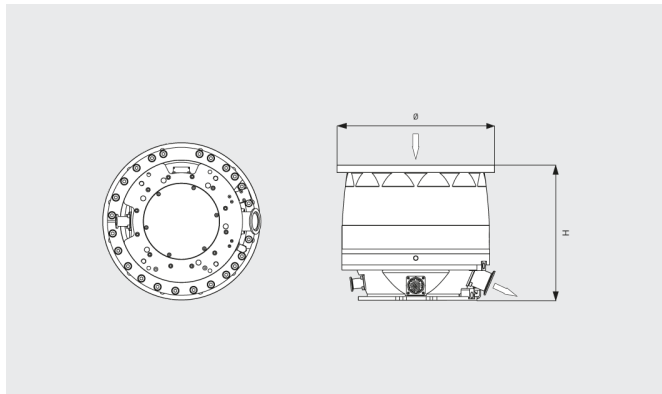

Pumping speed

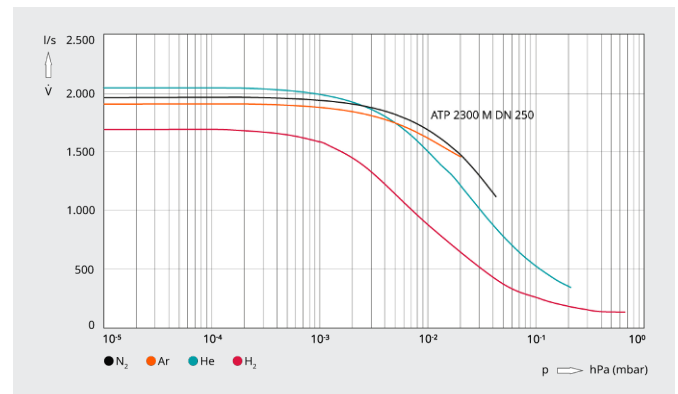

ATP 2300 M	
Pumping speed N ₂	1450-1950 l/s
Pumping speed Ar	1400-1900 l/s
Pumping speed He	1700-2050 l/s
Pumping speed H ₂	1600-1700 l/s
Compression ratio (ISO 5302) N ₂	$> 1 \cdot 10^8$ l/s
Compression ratio (ISO 5302) Ar	$> 1 \cdot 10^8$ l/s
Compression ratio (ISO 5302) He	$> 1 \cdot 10^5$ l/s
Compression ratio (ISO 5302) H ₂	$> 7 \cdot 10^3$ l/s
Ultimate pressure	$< 4 \cdot 10^{-9}$ mbar
Max. forevacuum N ₂	2.1 mbar
Max. forevacuum Ar	1.7 mbar
Max. forevacuum He	1.5 mbar
Max. forevacuum H ₂	1.9 mbar
Max. inlet vacuum N ₂	0.04 mbar
Max. inlet vacuum Ar	0.011 mbar
Max. inlet vacuum He	0.2 mbar

ATP 2300 M

Turbomolecular vacuum pumps

PFEIFFER
VACUUM+FAB SOLUTIONS

Part of the **BUSCH** GROUP

ATP 2300 M	
Max. inlet vacuum H ₂	0.7 mbar
Gas throughput at final rotational speed N ₂	2200 sccm
Gas throughput at final rotational speed Ar	900 sccm
Gas throughput at final rotational speed He	> 3000 sccm
Gas throughput at final rotational speed H ₂	> 3000 sccm
Recommended purge flow rate	50 sccm
Rotational speed	31000 rpm
Rotational speed variable	15000 rpm to nominal speed
Run-up time up to 90% of final rotational speed, with pressure exhaust < 0.1 mbar	< 8 min
Controller power supply	200-240 V, 50/60 Hz Single-phase
Max. power consumption for start-up	1000 W
Nominal power (stand-by power)	130 W
Max. baking temperature	120 °C
Recommended cooling water flow rate	60 l/h
Cooling water temperature	15-40 °C
Remote controller type	Magpower
Recommended backing pump	ADP/ADS
Sound pressure level (ISO 2151) 1m distance at nominal speed	< 46 dB(A)
Vibration level at nominal speed	< 0.01 µm
Dimensions (Ø x H)	315 x 278* mm
Weight approx.	52 kg
Controller weight approx.	8.7 kg
Gas inlet / Gas outlet	DN 200, DN 250 / DN 40 ISO-KF
N ₂ purge flange	DN 16 ISO-KF
Stainless steel inlet screen (factory setting)	yes
Permissible magnetic field (radial value) at 10 cm	< 12 mT
On-board control option	Profibus, Remote

* depending on flange variant

DO YOU WANT TO KNOW MORE?

Get in touch with us directly!



CONTACT FORM