

HiCube Neo RGA

##



##

DigiLine ##

###

##, ## ##, ## ## # #### ## ##

###

##

####

- ## #####
- ## ## ##
- ## #####
- ## ##
- ## ##
- ## ## ## ## ##
- ## ## ##
- ## ##
- ##### ##

- #### ## ##
- #### ##
- ## ##
- Pfeiffer MassSpec ##### ## ##
- ## ##
- ## ## ##
- ## ##
- #### ##


HiCube Neo RGA

###



##

##

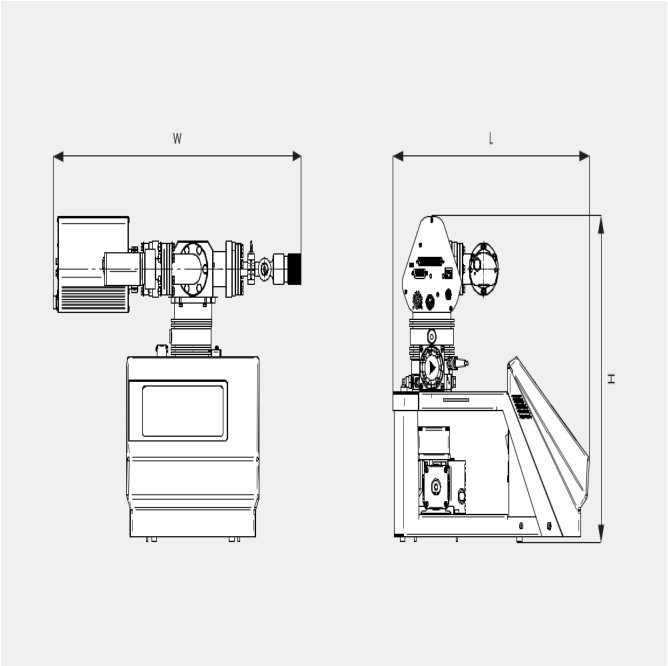

ISO Hz# #####.

	HiCube Neo RGA (QMG 250 F1)	HiCube Neo RGA (QMG 250 F2)	HiCube Neo RGA (QMG 250 F3)
## ##	1 - 100 u	1 - 200 u	1 - 300 u
## ##	$4 \cdot 10^{-13}$ hPa(mbar)	$5 \cdot 10^{-13}$ hPa(mbar)	$7 \cdot 10^{-13}$ hPa(mbar)
Ar ##	$5 \cdot 10^{-4}$ A/hPa (mbar)	$4 \cdot 10^{-4}$ A/hPa (mbar)	$3 \cdot 10^{-4}$ A/hPa (mbar)
## ## ##	$5 \cdot 10^{-4}$ hPa(mbar)	$5 \cdot 10^{-4}$ hPa(mbar)	$5 \cdot 10^{-4}$ hPa(mbar)
## ####	## 6 mm, ## 125 mm	## 6 mm, ## 125 mm	## 6 mm, ## 125 mm
## #####	200 °C	200 °C	200 °C
## ## ##	5 - 50 °C	5 - 50 °C	5 - 50 °C
##### ##	300 °C (##### ##)	300 °C (##### ##)	300 °C (##### ##)
##(L x W x H)	446 x 583 x 434 mm	446 x 583 x 434 mm	446 x 583 x 434 mm
## ####	DN 16 ISO-KF / DN 40 CF-F	DN 16 ISO-KF / DN 40 CF-F	DN 16 ISO-KF / DN 40 CF-F
####	####	####	####
## #### ##	< 10 ppm	< 20 ppm	< 50 ppm

HiCube Neo RGA

###



	HiCube Neo RGA (QMG 250 F1)	HiCube Neo RGA (QMG 250 F2)	HiCube Neo RGA (QMG 250 F3)
10% ## ##### ###	0.5 - 2.5 u	0.5 - 2.5 u	0.5 - 2.5 u
## ##	1 ms - 16 s/u	1 ms - 16 s/u	1 ms - 16 s/u
### ##	22 - 27 kg	22 - 27 kg	22 - 27 kg
## ##	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
#####	###	###	###
## ### ## ###	± 0.5 %	± 0.5 %	± 0.5 %
## ##	### # ## 240 W, ## # 400 W	### # ## 240 W, ## # 400 W	### # ## 240 W, ## # 400 W

ISO Hz# #####.

	HiCube Neo RGA (QMG 250 M1)	HiCube Neo RGA (QMG 250 M2)	HiCube Neo RGA (QMG 250 M3)
## ##	1 - 100 u	1 - 200 u	1 - 300 u
## ##	4 · 10 ⁻¹³ / 3 · 10 ^{-1#} hPa(mbar)	5 · 10 ⁻¹³ / 4 · 10 ^{-1#} hPa(mbar)	7 · 10 ⁻¹³ / 5 · 10 ^{-1#} hPa(mbar)
Ar ##	5 · 10 ⁻⁴ A/hPa (mbar)	4 · 10 ⁻⁴ A/hPa (mbar)	3 · 10 ⁻⁴ A/hPa (mbar)
## ## ##	5 · 10 ⁻⁴ / 5 · 10 ^{-#} hPa(mbar)	5 · 10 ⁻⁴ / 5 · 10 ^{-#} hPa(mbar)	5 · 10 ⁻⁴ / 5 · 10 ^{-#} hPa(mbar)
## ###	## 6 mm, ## 125 mm	## 6 mm, ## 125 mm	## 6 mm, ## 125 mm
## #####	200 °C(SEM# ## ## # ## 150 °C) °C	200 °C(SEM# ## ## # ## 150 °C) °C	200 °C(SEM# ## ## # ## 150 °C) °C
## ## ##	5 - 50 °C	5 - 50 °C	5 - 50 °C
##### ##	300 °C (##### ##)	300 °C (##### ##)	300 °C (##### ##)
##(L x W x H)	446 x 583 x 434 mm	446 x 583 x 434 mm	446 x 583 x 434 mm
## ###	DN 16 ISO-KF / DN 40 CF-F	DN 16 ISO-KF / DN 40 CF-F	DN 16 ISO-KF / DN 40 CF-F
####	C-SEM, #####	C-SEM, #####	C-SEM, #####
## ### ##	< 10 ppm	< 20 ppm	< 50 ppm
10% ## ##### ###	0.5 - 2.5 u	0.5 - 2.5 u	0.5 - 2.5 u
## ##	1 ms - 16 s/u	1 ms - 16 s/u	1 ms - 16 s/u
### ##	22 - 27 kg	22 - 27 kg	22 - 27 kg
## ##	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC

HiCube Neo RGA

##



	HiCube Neo RGA (QMG 250 M1)	HiCube Neo RGA (QMG 250 M2)	HiCube Neo RGA (QMG 250 M3)
#####	###	###	###
## ## ## ##	± 0.5 %	± 0.5 %	± 0.5 %
## ##	### # ## 240 W, ## # 400 W	### # ## 240 W, ## # 400 W	### # ## 240 W, ## # 400 W