

CT-TW

#-##



###

##

##

##, ## ## ## 1# ##, ## ## ### ## ## ## #

###

##

####

- ### ## ##### ## ##
- ### ## ##### N# ##


- ## ##### # ##

CT-TW

#-##

##

##

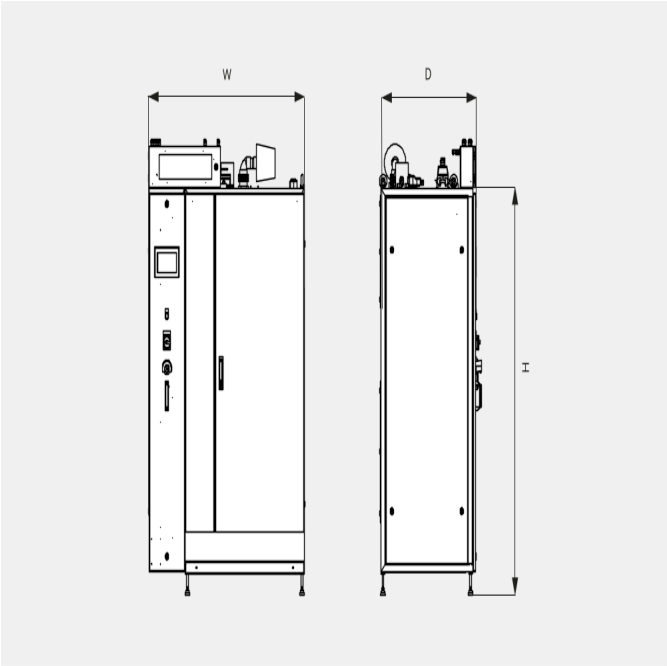

ISO Hz# #####.

	##	##	##
##	## ##	L1/L2/L3/N/PE	~400/208 V, 50/60 Hz
##	7 ... 10bar	½" ... 1" Swagelok	##: # 99%
#### (NaOH/KOH)	< 1 bar	1#2" ##	##: ≤ 50 %
##	3 ... 7bar	½" Swagelok	##
##	0 ... 2bar	1" ####	##: 18 - 65°C
#####	4 - 6 bar	¾" ... 1" Swagelok	##: 18 - 25°C
#####	0 - 4 bar	¾" ... 1" Swagelok	##: 30 - 50°C
#####	-0.5 - 130 mbar	DN25 KF ###	## ##
#####	-0.5 - 130 mbar	DN25 KF ###	AEX# ###
#####	-7.5 - -10 mbar	DN100 ###	AEX# ###
#####	-0.6 ... -2.5mbar	DN100 ###	GEX# ###
#####	## ##	## ##	600kg

CT-TW

#-##



	##	##	##
#####	## ##	## ##	## ##
## (WxDxH)	## ##	## ##	1300 x 800 x 1930mm

#####?

#####!
sales.de@pfeiffer-vacuum.com ## +49 (0)6441 802-1222



##



#####.